

HUGO PLUS S1P SRC



DESCRIERE	NORMA EN ISO 20345:2011	RESULTAT CERINTE NORMA	
Fete: : Microsuede	5.4.3 Rezistentă la sfasiere 5.4.6 Coeficient de Permeabilitatea la vapori de apa	108 N 1.3 mg/cm ² h 17.2 mg/cm ²	≥60 N ≥ 0,8 mg/cm ² h ≥ 15,0 mg/cm ²
Captuseala caputa : Material textil perforat, rezistent la abraziune, asigură aerisirea piciorului	5.5.1 Rezistentă la sfasiere 5.5.2 Rezistentă la abraziune (mediu umed) Rezistentă la abraziune (mediu uscat) 5.5.3 Coeficient de permeabilitatea la vapori de apa	42 N Fara decupaj Fara decupaj 8.7 mg/cm ² 70.8 mg/cm ²	≥ 15 N 25.600 cicluri 12.800 cicluri ≥ 2,0 mg/cm ² ≥ 20,0 mg/cm ²
Captuseala stăif: cu aerisire și rezistentă la abraziune	5.5.1 Rezistentă la sfasiere 5.5.2 Rezistentă la abraziune (mediu umed) Rezistentă la abraziune (mediu uscat) 5.5.3 Coeficient de permeabilitate la vapori de apa	42 N Fara decupaj Fara decupaj 8.7 mg/cm ² 70.8 mg/cm ²	≥ 15 N 51.200 cicluri 25.600 cicluri ≥ 2,0 mg/cm ² ≥ 20,0 mg/cm ²
Bombeau de siguranta: Nemetalic din material compozit, rezistent la soc și compresiune 200 j Lamela antiperforare: Lamela nemetalica,	5.3.2.3 Rezistentă la impact 5.3.2.4 Rezistentă la compresiune	17.5 mm 17 mm	≥ 14 mm ≥ 14 mm
	5.7.1 Grosime 5.7.3 Absorbția de apa	3.6 mm 97 mg/cm ²	≥ 2 mm ≥ 70 mg/cm ²

perforatie zero			
Acoperis de brant: Talpa interioara detasabila, captusita, antistatica	5.7.4.2 Rezistenta la abraziune (mediu umed) Rezistenta la abraziune (mediu uscat)	Fara perforatii Fara perforatii	25.600 cicluri 12.800 cicluri
Talpa: PU D, talpa aderenta, SRC	5.8.2 Rezistenta la sfasiere 5.8.3 Rezistenta la abraziune 5.8.4 Rezistenta la flexare 5.8.5.Hidroliză 6.4.2 Rezistenta la uleiuri 5.11 Rezistenta la alunecare pe placi ceramice spalate cu detergent Alunecare pe suprafata totala a talpii Alunecare pe calcai Rezistenta la alunecare pe placi din otel acoperite cu glicerina Alunecare pe suprafata totala a talpii Alunecare pe calcai	6.8 kN/m 168 mm ³ 2.5 mm 4 mm 0.2% 0,49 0,48 0,26 0,22	≥ 8 kN/m ≤150mm ³ ≤ 4,0 mm ≤ 6,0 mm ≤ 12% ≥ 0,32 ≥ 0,28 ≥ 0,18 ≥ 0,13

MARIMI : 35-48 MONDOPOINT 11

EXENA S.r.l.

Via Breda, 7/A – Zona Ind.le A 62012 – CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519 C.F. e P. IVA: 01336080435 – Reg.Imprese MC n.01336080435 – REA MC144207
www.exena.it – info@exena.it - pec: amministrazione@pec.exena.it

HUGO PLUS S1P SRC



DESCRIPTION	NORMA EN ISO 20345:2011	RESULT	REQUIREMENT
UPPER: Microsuede	5.4.3 Tear strength	108 N	≥ 60 N
	5.4.6 Water vapor permeability	1,3 mg/cm ² h	≥ 0,8 mg/cm ² h
	Coefficient	17,2 mg/cm ²	≥ 15,0 mg/cm ²
VAMP LINING: Breathable, abrasion resistance.	5.5.1 Tear strength	42 N	≥ 15 N
	5.5.2 Abrasion resistance(Wet)	No fori	25.600 cycles
	Abrasion resistance(Dry)	No fori	12.800 cycles
	5.5.3 Water vapor permeability	8,7 mg/cm ² h	≥ 2,0 mg/cm ²
	Coefficient	70,8 mg/cm ²	≥ 20,0 mg/cm ²
QUARTER LINING: Breathable, abrasion resistance.	5.5.1 Tear strength	42 N	≥ 15 N
	5.5.2 Abrasion resistance(Wet)	No fori	51.200 cycles
	Abrasion resistance(Dry)	No fori	25.600 cycles
	5.5.3 Water vapor permeability	8,7 mg/cm ² h	≥ 2,0 mg/cm ²
	Coefficient	70,8 mg/cm ²	≥ 20,0 mg/cm ²
SAFETY TOE CAP: Non-metallic polycarbonate safety toe.	5.3.2.3 Impact resistance	17,5 mm	≥ 14 mm
	5.3.2.4 Compression resistance	17 mm	≥ 14 mm
PIERCE-RESISTANCE: Textile pierce proof footbed,	5.7.1. Thickness	3,6 mm	≥ 2,0 mm
	5.7.3 Water absorption	97 mg/cm ²	≥ 70,0 mg/cm ²
FOOTBED: Removable, cushioned, antistatic insole.	5.7.4.2 Abrasion resistance(Wet)	No holes	25.600 cycles
	Abrasion resistance(Dry)	No holes	12.800 cycles
OUTSOLE: PU D, Antislip sole, SRC	5.8.2 Tear strength	6,8 kN/m	≥ 8 kN/m
	5.8.3 Abrasion resistance	168 mm ³	≤ 150 mm ³
	5.8.4 Flexing resistance	2,5 mm	≤ 4,0 mm
	5.8.5 Hydrolysis	4 mm	≤ 6,0 mm
	6.4.2 Oils resistance	0,2 %	≤ 12%
	5.11 Pressed ceramic tile floor on detergent resistance		
	Flat slip	0,49	≥ 0,32
	Heel slip	0,48	≥ 0,28
	Stainless steel plate on glycerin resistance		
	Flat slip	0,26	≥ 0,18
	Heel slip	0,22	≥ 0,13

MISURE : 35-48

EXENA S.r.l.

Via Breda, 7/A – Zona Ind.le A 62012 – CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519

C.F. e P. IVA: 01336080435 – Reg.Imprese MC n.01336080435 – REA MC144207

www.exena.it – info@exena.it – pec: amministrazione@pec.exena.it

EC DECLARATION OF CONFORMITY

The Manufacturer

EXENA SRL

Declares that the new PPE described hereafter.

HUGO PLUS S1P SRC


Is in conformity with the essential requirements set out in Annex II Regulation (EU) 2016/425 and
it is identical to the PPE which is the subject of EC CERTIFICATE OF CONFORMITY N° **F-130-00277-18** N° **F-130-00277-18** issued by

CIMAC
C.so Brodolini, 19
27029 VIGEVANO (PV)
ITALY

.

Civitanova Marche lì 03/10/2018

Giacomo Bara
Sales Coordinator
EXENA SRL

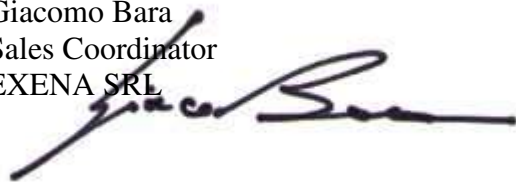

DECLARATIE DE CONFORMITATE CE

Prodicatorul

EXENA SRL

Declara ca echipamentul de protectie individuala descris in continuare.

HUGO PLUS S1P SRC

Este in conformitate cu cerintele stabilite in Anexa II din Regulamentul CE 2016/425 si este identic cu echipamentul de protectie individuala care face obiectul CERTIFICATULUI CE DE CONFORMITATE N° **F-130-00277-18** emis de

CIMAC

C.so Brodolini, 19

27029 VIGEVANO (PV)

ITALY

Civitanova Marche lì 03.10.2018

Giacomo Bara
Sales Coordinator
EXENA SRL



EXENA S.r.l.

Via Breda, 7/A – Z.na Ind. A62012 – CIVITANOVA MARCHE (MC) ITALY - Telefono: +39 0733 897256 - Fax: +39 0733 897519
P. IVA: 01336080435 - Reg. Impr. Trib . MC N. 01336080435- REA MC144207

www.exena.it – info@exena.it - pec: amministrazione@pec.exena.it